


# Laykold®

Unprecedented in the world of elastic indoor court systems, Laykold® Masters Montreal and Laykold® Masters Rome's engineered plywood HARO® sub-flooring promotes speedy installation. It provides superior force reduction properties with Laykold® Masters acrylics completing this extraordinary system.

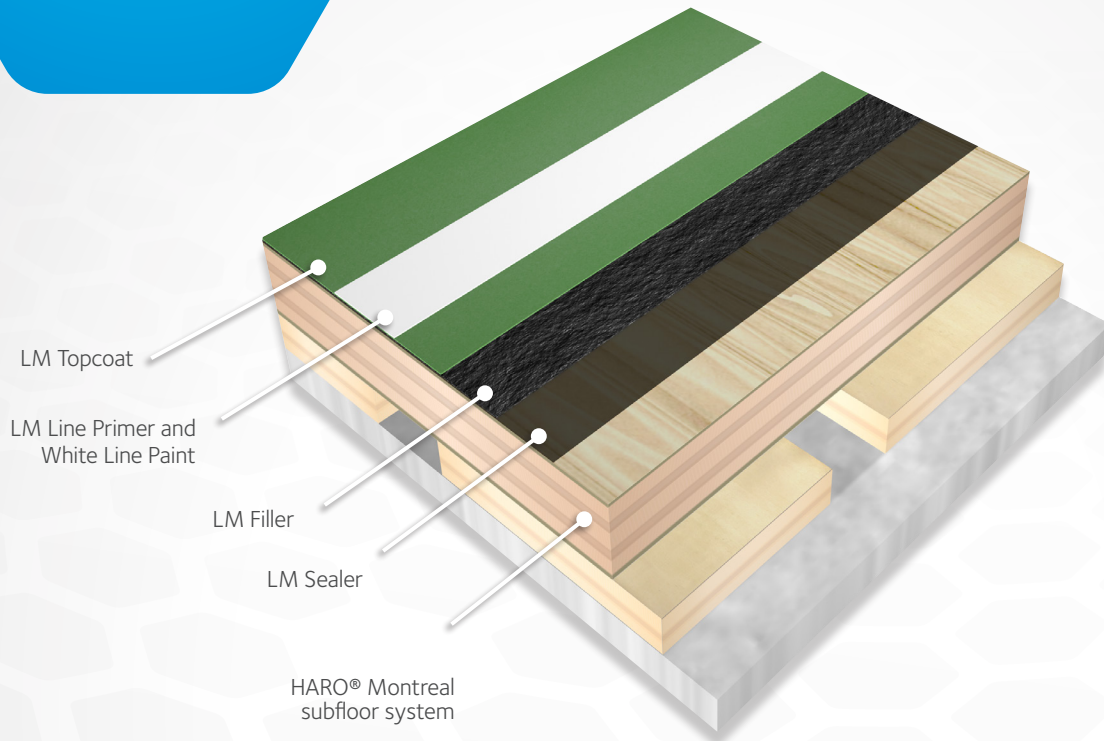

## MASTERS ROME

### Highlights

- Laykold® Masters Rome is the portable version of the Laykold® Masters Montreal system. Laykold® Masters Rome combines high performance with ultra fast installation and dismantling capabilities. The set up of an event court takes only 4-5 hours and dismantling 2-3 hours. This provides all of the characteristics for high profile and professional event demands
  - Portable options with 7' x 3.5' removable panels
  - Perfect for large events
- A competition floor of 8611.1ft<sup>2</sup> can be set up by 6 people in just 4 hours and disassembled again in 3
  - Perfect opportunities to be able to offer tennis events for arenas without extensive modification measures
- HARO® is the only sports floor manufacturer world-wide that offers certified portable sports floor with a special patented interlocking system

## MASTERS MONTREAL

### Highlights

- 5-year warranty
- Superior abrasion and UV resistance
- Multisport applications
- Longevity - subfloor lasts 30-40 years with ability to recoat (every 8-12 years)
- Versatility - use for retrofits, new installations, overlays (floating system)
- Manufactured by APT in an ISO 9001 Quality Assured and ISO 14001 Environmentally Conscious facility
- Wide variety of factory-textured colors available

PERFORMANCE  
ENHANCING  
SURFACE  
TECHNOLOGY



www.laykold.com • 724.452.1330




# Masters Montreal and Masters Rome

Game, set and match - a winning combination

The core and essence of the tennis court is founded in HARO® Montreal and Masters Rome, an area elastic subfloor in use for more than 40 years and served at many Olympic Games and Championships in a wide variety of sports. In 2011 HARO® Montreal and Rome was combined the first time with acrylic tennis court coatings to combine two unique features for tennis: area elastic flooring with the playability of widely known hard courts.

Imagine the shock absorption of an area elastic HARO® subfloor, with its specially engineered underlayment, combine it with the world class acrylic finish of Laykold® and you end up with a fantastic, uniquely performing tennis court.

Laykold® Montreal and Rome - a fusion of battle tested flooring systems. By blending these forces, athletes will be able to enjoy 60% force reduction, in combination with the perfect ball bounce and surface pace. The extent of shock absorption on a tennis court opens up a new dimension for player protection and will provide vastly increased comfort for the social tennis player.

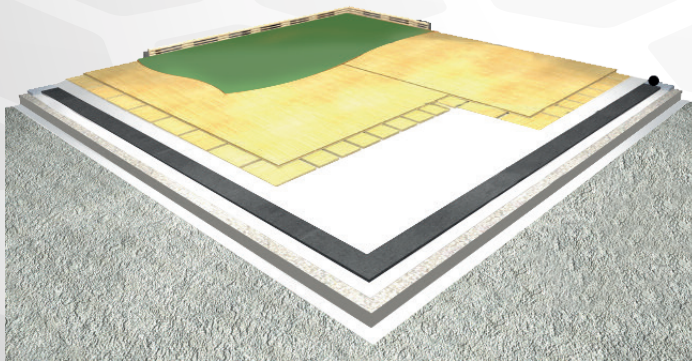

Professionals, tournament players on all levels and ambitious tennis enthusiasts will be able to train harder and longer and at the same time experience vastly reduced stress on their bodies.

## A SMASH HIT FOR YOUR MONEY

The longevity of this system with the HARO® subfloor lasting 30-40 years and the ability to recoat it when necessary (every 8-12 years) makes Laykold® Montreal and Rome an extremely valuable investment for court owners with invaluable benefits for its users. Laykold® Montreal and Rome with its ease of installation, versatility of use for retrofits, new installs, overlays (floating system) and unparalleled playing characteristics outperforms by leaps and bounds.

## THE GREEN PICTURE – A TEAM EFFORT

The underlayment materials provide the core to soften the blows from rallies and hustles. Wood harvested by FSC certified manufacturers reduces the environmental impact at the production of the HARO® subfloors and serve up elasticity. The long lasting Laykold® coatings reduce the chemical footprint and provide consistency and perseverance. All of which make a champion!

## THE FUNDAMENTALS:

| Mean values according to DIN 18032-2 |               |
|--------------------------------------|---------------|
| Shock Absorption                     | 60%           |
| Vertical Deflection                  | 3.6mm (5/32") |
| Deformation Control                  | 9%            |
| Roll Load                            | 1,500N        |
| Ball Rebound                         | 98%           |
| Slip Resistance                      | 68 BPN        |
| ITF Pace Rating                      | Medium        |

**HARO®**  
Sports Flooring



USA 724.452.1330

109 Conica Lane  
PO Box 160, Harmony, PA 16037 USA  
info@advpolytech.com

www.laykold.com • www.sportsbyapt.com

f @aptworldwide

Laykold® is a registered trademark of APT Corporation